

Local Mount Temperature Switches

ML1H, L2H

Features

- ▶ Reliable & accurate
- ▶ Local sensing
- ▶ NEMA 4
- ▶ UL, CSA & CE approved
- ▶ Single or dual switching

Applications

- ▶ Oil & gas
- ▶ Mining
- ▶ Tanks and reservoirs
- ▶ Compressors
- ▶ Plastic machinery
- ▶ Factory automation
- ▶ Process equipment
- ▶ Machine tools and industrial equipment



General Specifications*


Accuracy: (Repeatability)	±1% of mid-60% of full range. At constant ambient ±0.5% of full scale. (Knob indication is reference only)	Approvals/Listings:	Underwriters’ Laboratories, Inc. and Canadian Standard Assoc. are listed under temperature indicating and regulating equipment.
Switch:	Single: 1 SPDT Dual switching: 2 independent SPDT circuits	UL:	File No. E56247, Guide No. XAPX
Electrical Characteristics:	All models incorporate Underwriters’ Laboratories, Inc. and CSA listed single pole double throw snap-action switching elements. Switches may be wired normally open or normally closed.	CSA:	File No. LR34555, Guide 400-E-O Class 4813
Wetted Parts:	Brass or 304 stainless steel	Temperature Range:	See product configurator.
Electrical Connection:	Single: 3-pin terminal strip Dual: 6-pin terminal strip	Adjustment:	Tamper resistant external adjustment. Turn knob clockwise to increase setpoint. (Knob indication is reference only)
Electrical Ratings:	AC value at 50% power factor — 10 amps 125, 250 volts AC, 3 amps 480 volts AC. Automatically reset by snap-action of switch.	Weight:	Single: approximate 1.5 lbs. Dual: approximate 3.0 lbs.
Enclosure/Housing:	Water-tight and dust-tight indoor and outdoor (NEMA 4) / oil-tight and dust-tight indoor (NEMA 13).		
Local Mount:	Immersion length 2-1/16 inches		

* See Product Configurator for additional options.

Wiring Code

Lead	Circuit #1	Circuit #2
Normally Closed	Blue	Orange
Common	Purple	Brown
Normally Open	Red	Yellow


Wiring Diagram

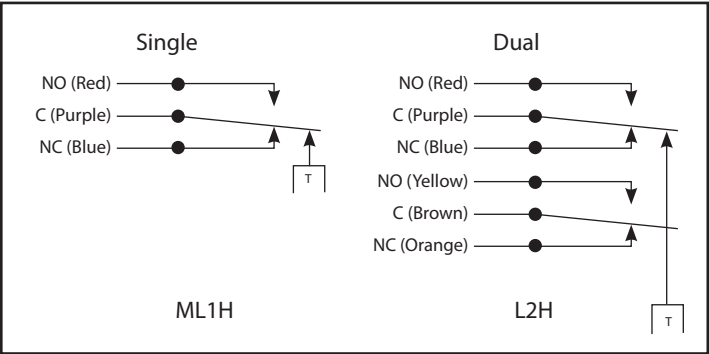

Local Mount Temperature Switches

ML1H, L2H

Technical Drawing

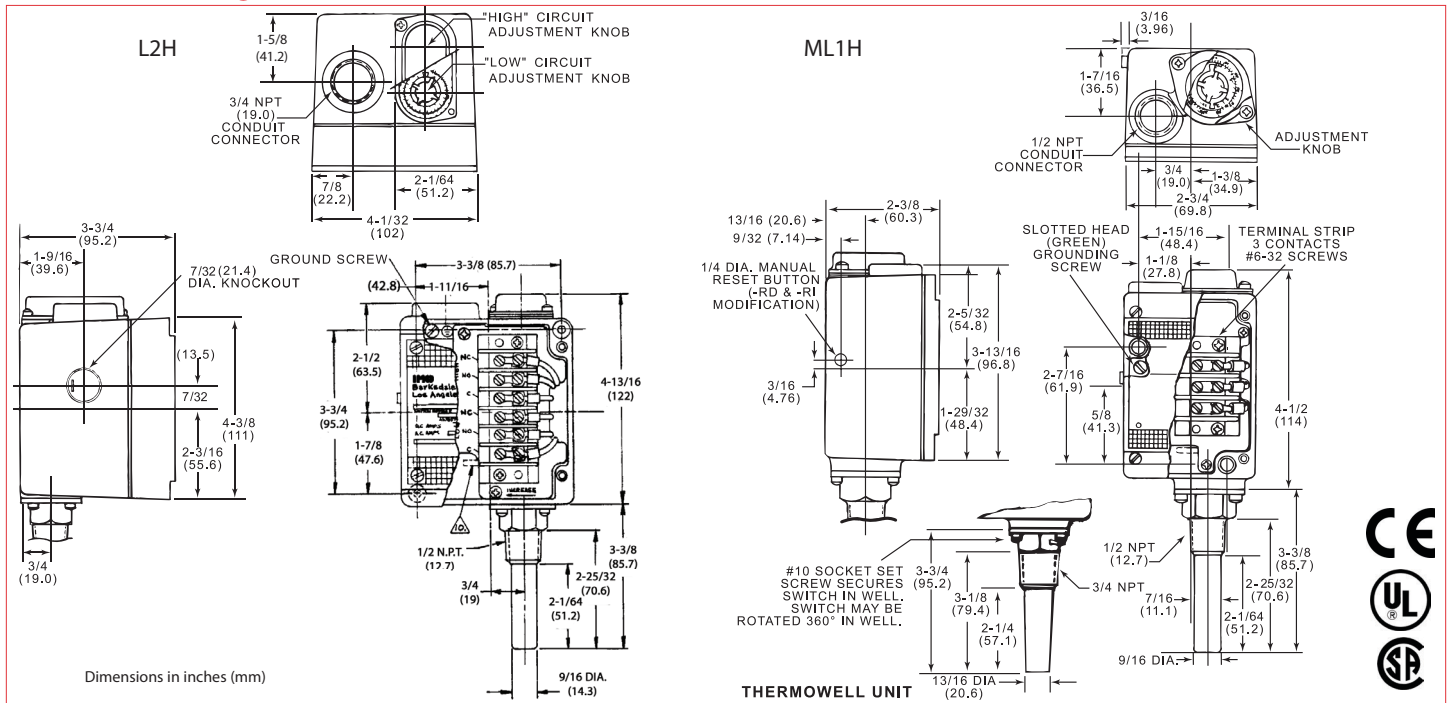

Product Configurator

Example: H M L1 H -HH 202 S -WS -FX

* Highlighted options represent those most frequently used. Select these common options for improved availability. (5/21)

Options

- RD^{2,3} Manual reset (use with "G" limit switch)
- FX⁴ NEMA 4X enclosure
- SXXX Factory preset

Thermowell

- W Brass local mount thermowell
- WS 316 stainless steel local mount thermowell
- Z18 Replacement temperature switch for thermowell models, without the thermowell.

Wetted Material

- Blank Blank if brass
- S 304 stainless steel sensor

Limit Switch ¹

- H 10 amps @ 125/250 VAC; 3 amp @ 480 VAC (standard)
- G² 10 amps @ 125/250/480 VAC; 2 amps @ 600 VAC; 0.4 amps @ 125 VDC; MANUAL RESET
- L 15 amps @ 125/250/480 VAC; 0.03 amps @ 125 VDC; 0.02 amps @ 250 VDC
- M 10 amps @ 125/250 VAC; 3 amp @ 480 VAC; 0.5 amps @ 125 VDC; 0.25 amps @ 250 VDC
- S 15 amps @ 125/250/480 VAC; 0.05 amps @ 125 VDC; Adjustable differential
- GH 1 amp @ 125VAC; Gold Contacts
- CC Hermetically sealed; 10 amps @ 125/250 VAC
- HH Hermetically sealed; 5 amps @ 125/250 VAC

Sensor Switch

- L1 Single set point (SPDT)
- L2 Dual set point (2 SPDT)

Enclosure

- H NEMA 4 enclosure

Hermetically sealed limit switch option - Class I, Division II (requires CC or HH limit switch 60° Ta max)

- Blank Standard

Single switch models

- M

Dual switch models

- Blank

NOTES:

¹ Changing limit switch will effect dead band; See sales drawing.

² Use G limit switch for single set point models that need this option.

When selecting the manual reset option on dual setting switches (L2H), the manual reset limit switch will be on the high circuit. The low circuit limit switch must be specified by the customer.

³ Not available with hermetically sealed limit switches.

⁴ Add 'S' wetted material. FX models require stainless steel sensor.

Range	Adjustable Range				Media Temperature Limit (Proof)				Differential (Approx.) ¹	
	Low	High	Low	High	Low	High	Low	High	°F	°C
201	-50°F	+75°F	-45°C	+24°C	-100°F	+250°F	-73°C	+121°C	1° to 3°	.5° to 1.6°
202	+15°F	+140°F	-9°C	+60°C	-100°F	+250°F	-73°C	+121°C	1° to 3°	.5° to 1.6°
203	+75°F	+200°F	+24°C	+93°C	-100°F	+250°F	-73°C	+121°C	1° to 3°	.5° to 1.6°
351	+100°F	+225°F	+38°C	+107°C	-100°F	+400°F	-73°C	+205°C	1° to 3°	.5° to 1.6°
204	-50°F	+200°F	-45°C	+93°C	-100°F	+250°F	-73°C	+121°C	1° to 3°	.5° to 1.6°
354	+100°F	+350°F	+38°C	+177°C	-100°F	+400°F	-73°C	+205°C	1° to 3°	.5° to 1.6°
454	+150°F	+450°F	+66°C	+232°C	0°F	+500°F	-18°C	+260°C	3° to 6°	1.6° to 3.3°