
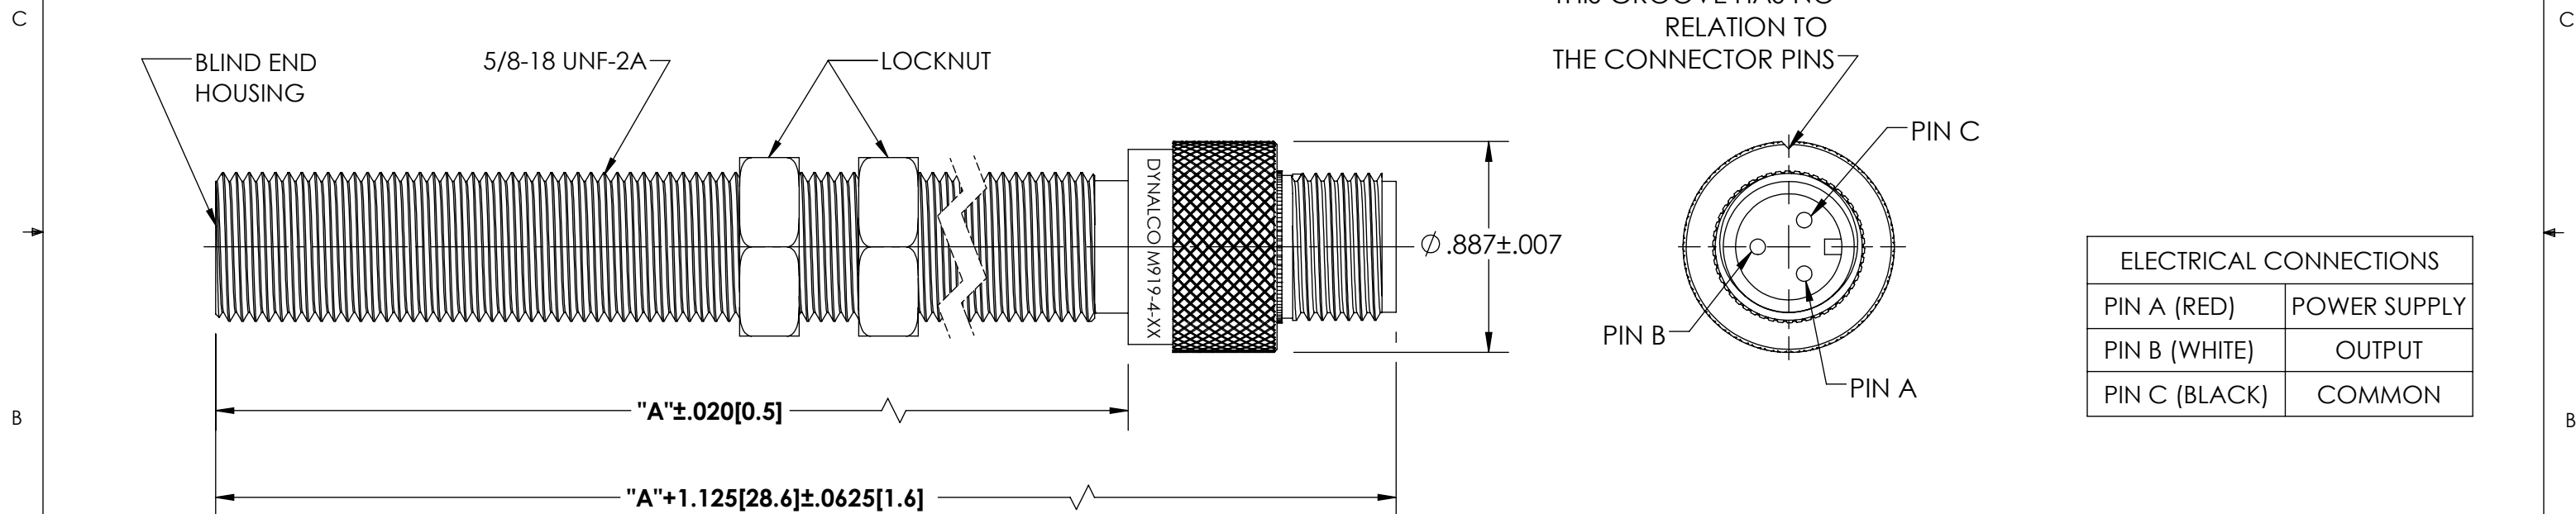


PRODUCT CONFIGURATOR	
M919-4	-L2.5
▽	▽
BASE NUMBER	DIM "A" THREAD LENGTH
M919-4 Hall-Effect (≥0 RPM) Senses Ferrous Material 12-28VDC Input Power SEE NOTE#1	-L2.5: 2.5[63.5] -L4.5: 4.5[114.3] -L5.25: 5.25[133.3] -Lxx: Custom length (consult factory)

REV	ECN	REVISION RECORD	DATE	DR	CK
A	11542	INITIAL RELEASE	10/17/19	SS	PV

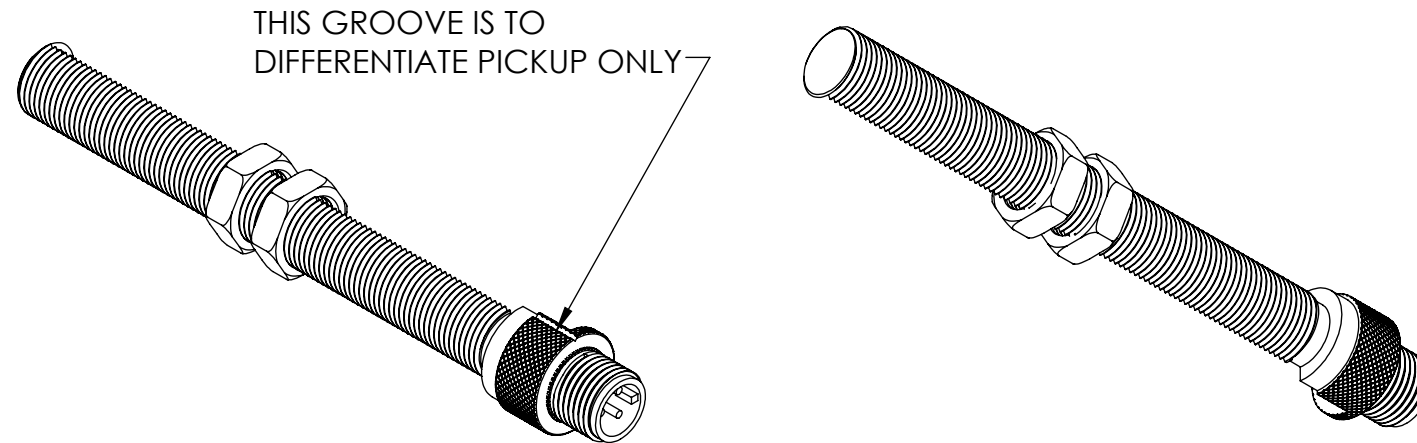

NOTES:

1. POWER SUPPLY: 12 TO 28 VDC
2. SUPPLY CURRENT: 40 mA MAXIMUM
3. OPERATING TEMPERATURE: -30° F TO +230° F (-35°C to 110°C)
4. SENSED FREQUENCY: 0 TO 20 KHZ
5. OUTPUT CURRENT: 50±15% DUTY CYCLE WITH A 138 OHMS LOAD.
 - LOGIC 0: < 0.05 mA.
 - LOGIC 1: > 19.5 mA.
6. INSULATION RESISTANCE: 100 MΩ MIN. AT 50 VDC (COMMON TO HOUSING)
7. HOUSING: 303 STAINLESS STEEL, BLIND END.
8. MAXIMUM OPERATING AIR GAP: 0.120".
9. DIMENSIONS ARE IN INCHES [MM].

THIS DOCUMENT, ALL INFORMATION CONTAINED IN AND ALL INFORMATION RELATED TO, IS PROPERTY OF DYNALCO. IS CONFIDENTIAL TO IT AND NO PART THEREOF NOR ANY SUCH INFORMATION MAY BE COPIED, DISSEMINATED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE PRIOR WRITTEN CONSENT OF DYNALCO AND IS TO BE RETURNED TO DYNALCO UPON REQUEST.

UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION	
DIMENSIONS ARE IN INCHES DIMENSIONAL TOLERANCES: FRACTIONAL ± 1/64 ANGULAR: ± 1/2° XX ± 0.010 XXX ± 0.005		DYNALCO	
MODEL: M919-4	DATE: 10/17/2019	DRAWN: SS	APPROVED: PV
MATERIAL: -	TITLE: PICKUP, ZERO VELOCITY		
FINISH: -	SIZE: B	DWG. NO. 800-0919-4	REV: A
DO NOT SCALE DRAWING	SCALE 1:2	WEIGHT	SHEET 1 OF 1