

Actuated Heavy Duty Valves

Series II - 14, 18, 92, 376, 20, 562

Features

- ▶ Original Shear-Seal® technology
- ▶ Air or hydraulic integrated actuator
- ▶ 2- and 3-position
- ▶ Superior shifting performance
- ▶ High velocity flow
- ▶ Compact design
- ▶ Corrosion resistant materials
- ▶ Position indication

Applications

- ▶ Land-based & offshore oil drilling controls
BOP control units
- ▶ Steel mills
- ▶ Shipboard hydraulic control systems
- ▶ Refineries and chemical processing plants



General Specifications*

Main Valve

Working Pressure:	Hydraulic up to 3,000 or 6,000 psi (206 bar or 413 bar) Air up to 2,000 or 4,000 psi (138 or 276 bar)
Back Pressure:	Must not exceed 250 psi (17.2) bar at return port for satisfactory operation
Proof Pressure:	1-1/2 times working pressure except at return port
Burst Pressure:	2-1/2 times working pressure except at return port (3,000 psi [206 bar])
Pressure Drop (all Valves):	See supplemental guide for detailed information
Porting:	1/4", 3/8", 1/2", 3/4", 1", & 1-1/2" NPT Standard (SAE J1926 Option)
Media Temperature Range:	-40° to +250°F (-40° to +121°C)
Handle Detent:	All valves have 3-position detents for manual shift to Center position
Panel Mounting:	Standard for 1/4", 3/8", 1/2" valves Refer to sales drawings for 1" & 1-1/2" valves
Wetted Materials:	Body: Al-Ni bronze Shaft: Stainless steel Rotor & Seals: 400 series stainless steel Standard O-Rings: Buna N
External:	
Housing:	Al-Ni Bronze
Hardware:	Stainless Steel
Handle & Detent Disc:	Stainless Steel

Pilot Actuator


Working Pressure:	
Air:	80 psi (5.2 bar) minimum 250 psi (17.2 bar) maximum
Hydraulic:	500 psi (34 bar) minimum 1,500 psi (103 bar) maximum
Porting:	1/4"- 18 NPT (2)
Media Temperature Range:	-40° to +250°F (-40° to +121°C)
Speed of Operation:	Greater than or equal to 1/2 second to avoid damage.
Materials:	
Cylinder:	Air -Amalga (Std.) -Stainless steel (Opt.) Hydraulic - Stainless steel (Std.)
End Plate:	Stainless steel 1/4", 3/8", 1/2" Al-Ni Bronze 3/4" 1" & 1-1/2"
Hardware:	Stainless steel

* See product configurator for additional options.




Technical Drawings

2-Position Valve

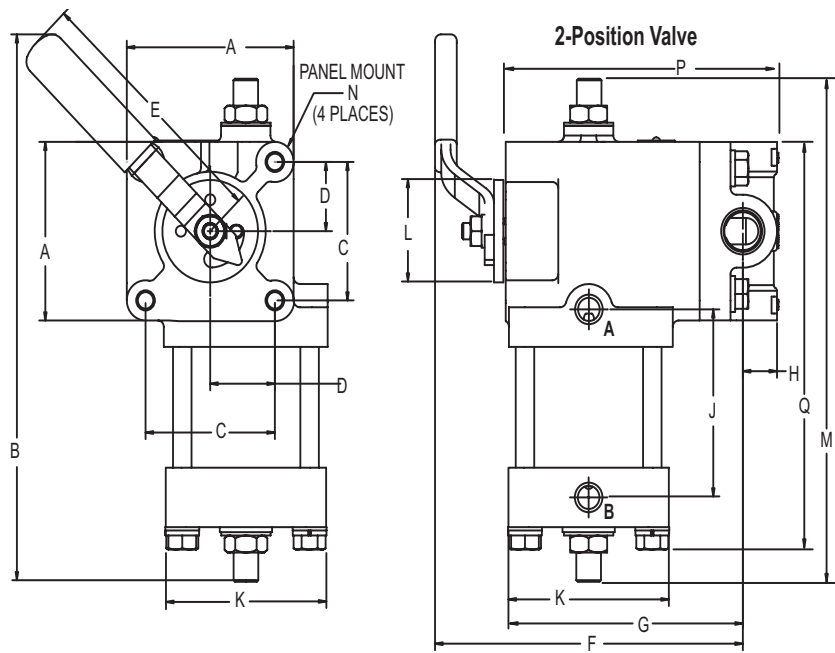


1/4", 3/8", 1/2"

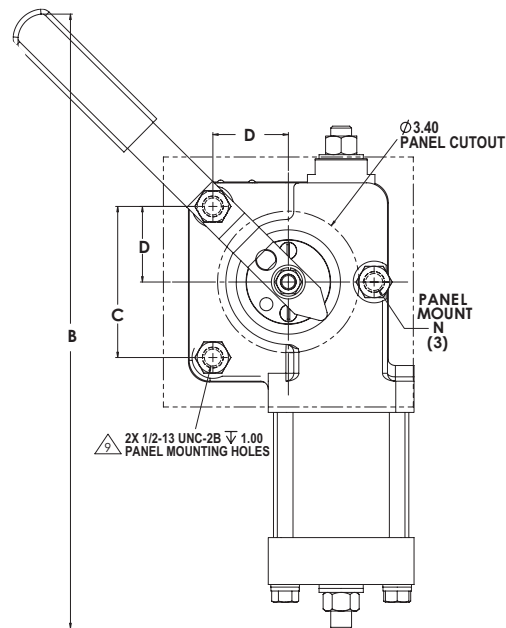


3/4", 1", 1 1/2"

Refer to Sales Drawings for more detailed information

2-POSITION FLOW PATTERN SELECTOR (VIEWED FROM SHAFT END)

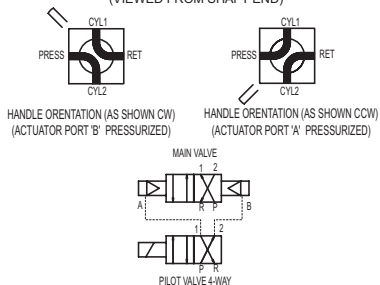

CLOSED CENTER MANIPULATOR FLOW PATTERN (VIEWED FROM SHAFT END)

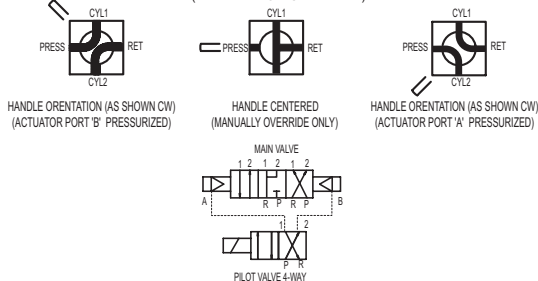


Porting	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U
1/4" NPT	2.75 (69.9)	10.38 (254.0)	2.00 (50.8)	1.00 (25.4)	5.00 (127.0)	5.72 (146.1)	4.25 (108)	0.50 (12.7)	3.34 (85)	3.25 (82.6)	1.94 (49.2)	9.43 (231.7)	3/8-18 UNC	4.88 (124.0)	7.44 (189.0)	NA	NA	NA	NA
3/8" & 1/2" NPT	3.406 (86.5)	10.937 (277.8)	2.625 (66.7)	1.312 (33.3)	5.00 (127.0)	6.25 (158.8)	4.750 (120.65)	0.688 (17.46)	3.531 (89.7)	3.25 (82.6)	1.94 (49.2)	9.531 (242.1)	3/8-18 UNC	5.50 (139.7)	7.85 (199.3)	NA	NA	NA	NA
3/4" & 1" 2 pos NPT	4.781 (121.4)	14.375 (365.1)	3.625 (92)	1.812 (46)	9.00 (228.6)	8.75 (222.3)	6.562 (166.6)	1.00 (25.4)	4.25 (108)	3.50 (88.9)	3.00 (76.2)	12.00 (482.0)	1/2-13 UNC	7.562 (192.0)	10.125 (257.0)	NA	NA	NA	NA
1-1/2" 2 pos NPT	6.75 (171.5)	16.00 (406.4)	5.312 (134.9)	2.656 (67.5)	9.00 (228.6)	10.50 (266.7)	8.139 (209)	1.50 (38.1)	4.00 (101.6)	4.75 (120.7)	3.00 (76.2)	12.00 (482.0)	1/2-13 UNC	8.31 (211.1)	NA	NA	NA	NA	NA

Actuated Heavy Duty Valves



Series II - 14, 18, 92, 376, 20, 562

Technical Drawings

3-Position Valve

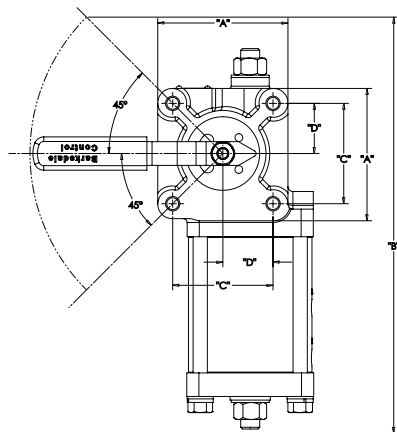


1/4", 3/8", 1/2"

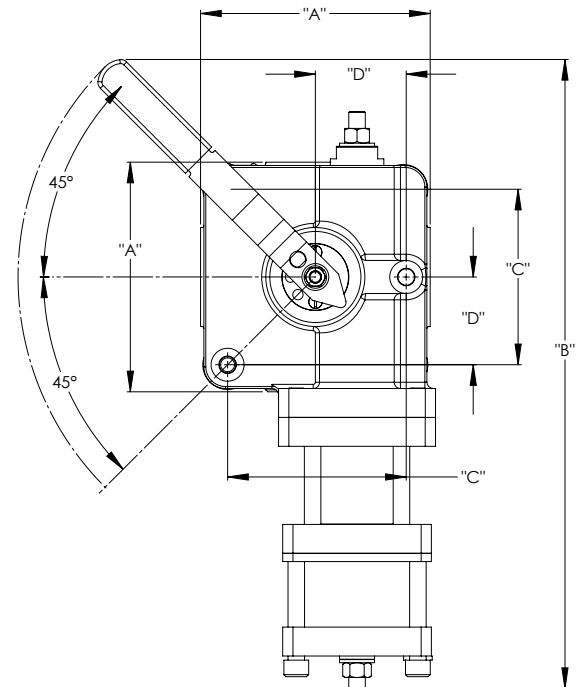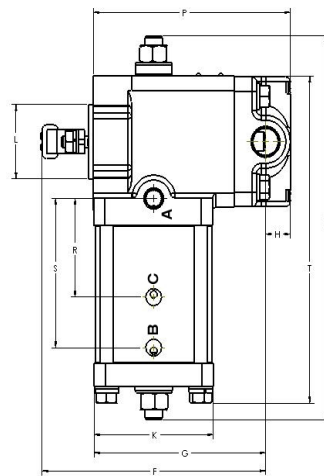


3/4", 1", 1 1/2"

Refer to Sales Drawings for
more detailed information

3-POSITION FLOW PATTERN SELECTOR (VIEWED FROM SHAFT END)

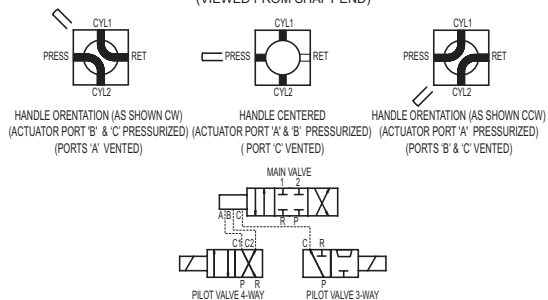

CLOSED CENTER MANIPULATOR FLOW PATTERN (VIEWED FROM SHAFT END)

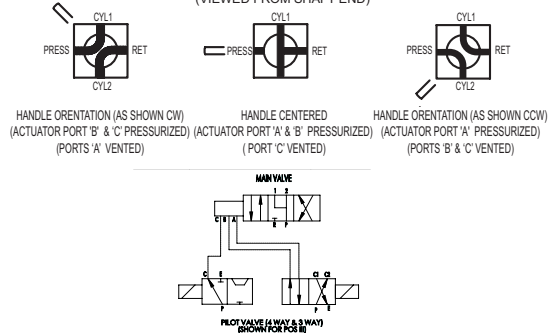

Porting	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U
1/4" NPT	2.75 (69.9)	10.38 (254.0)	2.00 (50.8)	1.00 (25.4)	5.00 (127.0)	5.72 (146.1)	4.25 (108)	0.50 (12.7)	3.34 (85)	3.25 (82.6)	1.94 (49.2)	9.43 (231.7)	3/8-18 UNC	4.88 (124.0)	7.44 (189.0)	2.44 (62)	3.75 (95.3)	6.44 (214.4)	10.468 (265.9)
3/8" & 1/2" NPT	3.406 (86.5)	10.937 (277.8)	2.625 (66.7)	1.312 (33.3)	5.00 (127.0)	6.25 (158.8)	4.75 (120.65)	0.688 (17.46)	3.531 (89.7)	3.25 (82.6)	1.94 (49.2)	9.531 (242.1)	3/8-18 UNC	5.50 (139.7)	7.85 (199.3)	2.56 (65.1)	3.88 (98.4)	8.688 (220.7)	10.25 (260.4)
3/4" & 1" 3 pos NPT	4.813 (122.3)	17.313 (439.8)	3.625 (92)	1.812 (46)	9.00 (228.6)	8.750 (222.3)	6.562 (166.6)	1.00 (25.4)	4.250 (108)	4.50 (114.3)	3.00 (76.2)	12.00 (482.0)	1/2-13 UNC	7.563 (192.1)	NA	3.938 (100)	7.063 (179.4)	NA	15.188 (385.8)
1-1/2" 3-Pos NPT	7.00 (177.8)	18.75 (476.3)	5.25 (133.4)	2.656 (67.5)	9.00 (228.6)	10.50 (266.7)	8.138 (209)	1.50 (38.1)	4.00 (101.6)	4.50 (114.3)	3.00 (76.2)	17.50 (444.5)	1/2-13 UNC	8.31 (211.1)	NA	4.188 (106.4)	7.313 (185.7)	NA	17.50 (444.5)

Flow Capacity

	Main Valve Port Size	Flow Capacity (Approx.) Service: Oil and Lubricated Water			Min. Flow Passage Dia.	Cv Factor	Approx. Shipping Weight 2 Pos.	Approx. Shipping Weight 3 Pos.
		20 ft/sec. gpm (l/min.)	40 ft/sec. gpm (l/min.)	60 ft/sec. gpm (l/min.)				
A14/A92 & A376 Series Valve	1/4"	3 (11)	6 (23)	9 (34)	1/4"	0.95	30	32
	3/8" & 1/2"	9 (34)	19 (72)	28 (106)	7/16"	3.20	35	37
	3/4" & 1"	25 (95)	50 (189)	75 (284)	23/32"	9.20	50	52
	1-1/2"	57 (217)	114 (433)	171 (650)	1-3/32"	21.00	129	134
A20/A562 Series Valve	1/4"	3 (11)	6 (23)	9 (34)	1/4"	0.95	30	32
	1/2"	5 (19)	10 (36)	15 (57)	5/16"	1.60	35	37
	1"	9 (34)	19 (72)	28 (106)	7/16"	3.20	50	52

Product Configurator

Example:	A	14	5	R	3	W	C	2		
----------	---	----	---	---	---	---	---	---	--	--

Actuator Media

A	Air cylinder
H	Hydraulic cylinder

Series II Models

14	3,000 psi (206 bar), 4-way selector or diverter
92	3,000 psi (206 bar), 4-way closed center manipulator
18	3,000 psi (206 bar), straight porting, 4-way selector, diverter or manipulator
376	3,000 psi (206 bar), 4-way sub-plate mount selector/diverter or closed center manipulator
20	6,000 psi (412 bar), 4-way selector or diverter

Port Size

1	1/4" NPT
2	3/8" NPT (14 and 92 series only)
3	1/2" NPT
4	3/4" NPT (14 and 92 series only)
5	1" NPT
7	1 1/2" NPT (14, 92 and 376 series only)

Port Location

R	Regular side porting
S	Straight (Bottom) porting (18 Series Only)
M	Manifold porting (376 series only)
P	Panel mount with side porting (Standard for 1/4", 3/8", 1/2")

Pressure Range

3	3,000 psi lubricated water or hydraulic oil, 2,000 psi air (14, 92 & 376 Series)
6	6,000 psi lubricated water or hydraulic oil, 4,000 psi air (20 & 562 series)

Working Media

W	Lubricated water or hydraulic oil
---	-----------------------------------

Flow Pattern

C	Closed center
O	Open center (tandem center)
Q	Closed center manipulator Standard on 92 and 562 series Optional on 376 Series in closed center only Not available on 14 and 20 Series

Notes:

1. See Supplemental Guide for the appropriate "Z" number
2. -G option is limited to 1" and 1.5" port sizes
3. Not available for 1.5" port size with Air Cylinder Actuator
4. Only for air Actuators.

Optional O-ring Material¹

-Zxx	See supplemental guide
------	------------------------

Options

-B	Position Indicator
-C ⁴	3 x 2 converter Allows 3-position valve to be actuated with 2 inlets (3-position actuator only)
-D	Diverter flow pattern (Excludes 1/4" port size and all 92 & 562 models)
-MS	SAE J1926 Porting (except 376 models)
-SS	Stainless Steel Cylinder (Air only) Optional for: 2-Pos Sizes: 1/4"- 1 1/2" and 3 Pos Size 1"
-G ²	1/4" NPT gauge ports for CYL 1 & 2

Position

2	2-position actuator, 90° rotation
3 ³	3-position actuator