


REVISIONS			
LTR	DESCRIPTION	DATE	APP

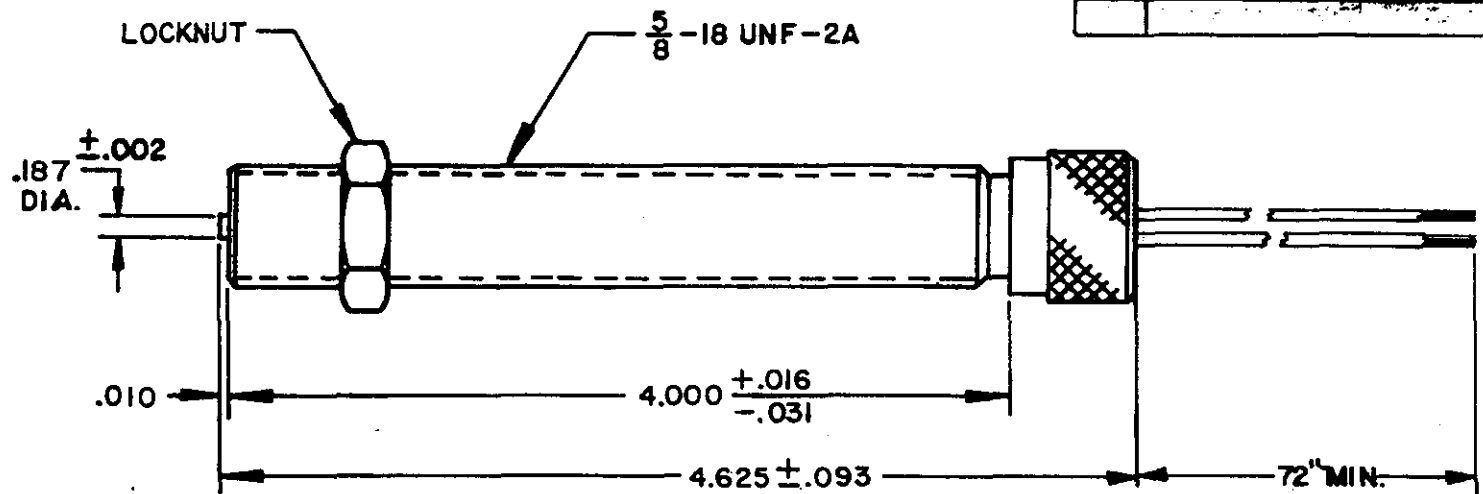

TEMPERATURE RANGE	OUTPUT VOLTAGE PEAK TO PEAK	DC RESISTANCE OHMS	INDUCTANCE MILLIHENRYS	OUTPUT LEADS	INSULATION RESISTANCE	NET WEIGHT
-65° F TO +225° F	18-23 VOLTS (SEE NOTE 1) 13 V TYP. AT 100 IPS	170-210 AT 75° F	12-16 AT 1 KHz.	AWG No. 22 (SEE NOTE 2)	100 MEGOHMS MIN. AT 500 VDC, COIL TO HOUSING	3.5 OZ. AVG.

NOTES:

- TESTED AT 1000 INCHES/SECOND WITH AN 8 PITCH, 12 TOOTH GEAR, 0.005" CLEARANCE AND 100K OHM LOAD SHUNTED BY 250 PF.
- WITH APPROACH OF FERROUS METAL, WHITE LEAD IS POSITIVE WITH RESPECT TO BLACK LEAD.

LIMITED OUTPUT CURRENT AND VOLTAGE

CONSTRUCTION:

HOUSING - 303 STAINLESS STEEL
POLE PIECE - 416 STAINLESS STEEL
POTTING - EPOXY RESIN

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE		DYNALCO® CORPORATION FORT LAUDERDALE, FLORIDA	
FRACT.	DEC.	ANGLES	DATE
±1/64	.XXX ±.008 XX ±.01	±1/2°	11-24-61
MATERIAL:		DRAWN M. MEZA	
FINISH:		APPROVED <i>L.O. Meza</i>	
DO NOT SCALE THIS DRAWING		TITLE	
		MAGNETIC PICKUP MODEL M192	
SCALE	SIZE	DRAWING NUMBER	REV.
—	A	8000192	