

**Installation Instructions, Pressure Regulator – 20313 Series**

**Manual Model: 20313,  
Air motor Operated: F20313,  
Hydraulic Motor Operated: G20313**



1. GENERAL -----	02
2. INTENDED USE -----	02
3. PED COMPLIANCE -----	02
4. SAFETY INFORMATION -----	02
5. TECHNICAL DATA -----	04
6. INSTALLATION -----	07
7. OPERATION -----	07
8. TROUBLESHOOTING / MAINTENANCE & REPAIR INSTRUCTIONS-----	08
9. TRANSPORT / STORAGE -----	10
10. DISPOSAL / RETURNS -----	10
11. NAMEPLATE -----	11
12. WARRANTY -----	11
13. MANUFACTURE AND INQUIRIES -----	11

**Barksdale**  
CONTROL PRODUCTS

Barksdale Inc.  
3211 Fruitland, Ave  
Los Angeles, CA 90058


Phone: 800 835-1060  
Fax: 323 589-3463  
e-mail: [sales@barksdale.com](mailto:sales@barksdale.com)



Bulletin No. 272378-B  
Date: 06-28-13  
Document & specifications are subject to  
change without notice.

## 1.0 GENERAL

To ensure proper and safe operation of a Barksdale Regulator, the entire manual must be read and understood clearly. Please pay special attention to all safety information.

 This sign is used in this instruction in case of hazards which might result in injuries and damages.

## 2.0 INTENDED USE

Barksdale's pressure regulators are sensitive, pressure-control devices used to maintain a pre-determined pressure in a hydraulic circuit. The regulated output pressure is controlled by adjusting the spring force by air or hydraulic motor or manually to balance the hydraulic loading. Design features ensure excellent accuracy, repeatability and high flow coefficients. This regulator works on Shear-Seal® technology which uses fluid pressure to maintain a leak-free metal to metal seal.

## 3.0 PED COMPLIANCE

To ensure that products intended for Europe meet the requirements of PED, it is necessary to determine the proper PED classification. In the PED, pressure equipment can be classified one of the following categories.

- SEP (Sound Engineering Practice)
- Category I, II, III, IV

### 3.1 SEP Products

This product falls under SEP category as per PED directive **97/23/EC**.

The SEP classification applies to pressure equipment that is not subject to Category I, II, III, or IV conformity assessment, but must be designed and manufactured with “sound engineering practice” as defined by the PED.

### 3.2 Product Classification

Use the Table 1 below to find the PED category of a specific product. Due to PED Classification limitations, some products may not be available at full rated pressures. Be sure to check the PED Product Classification table for any limitations.

**Table 1. PED categorization**

MODEL	DESCRIPTION	PORT SIZE (in)	DN (mm)	SUPPLY PRESSURE		PED CATEGORY
				PSI	Bar	
VALVE #		Inlet / Outlet / Vent	Inlet			Annex II Category
<b>20313</b>	<b>1/2" Heavy Duty Shear-Seal Regulator</b>	<b>0.5 / 0.5 / 0.5</b>	<b>12.7</b>	<b>5000</b>	<b>345</b>	<b>SEP</b>
20313S6WQ2	Manual operated - High Sensitivity	0.5 / 0.5 / 0.5	12.7	5000	345	SEP
20313S6WQ2-1	Manual operated - Full Range	0.5 / 0.5 / 0.5	12.7	5000	345	SEP
F20313S6WQ2	Air motor operated - High Sensitivity	0.5 / 0.5 / 0.5	12.7	5000	345	SEP
F20313S6WQ2-1	Air motor operated - Full Range	0.5 / 0.5 / 0.5	12.7	5000	345	SEP
GF20313S6WQ2	Hydraulic Motor Operated - High Sensitivity	0.5 / 0.5 / 0.5	12.7	5000	345	SEP
GF20313S6WQ2-1	Hydraulic Motor Operated - Full Range	0.5 / 0.5 / 0.5	12.7	5000	345	SEP


Refer product configurator for more options.


## 4.0 SAFETY INFORMATION

The recommendations below are general and it is the responsibility of the user to assure that installation and maintenance are in accordance with local requirements, API and ASME practices. This regulator should be installed by a trained service person. A media filter should be in the system to protect the regulator. It should not be installed for safety purpose. To maximize life it is suggested to follow ISO fluid cleanliness code ISO4406:1999 or thereafter. Neither Barksdale nor its agents assume any liability for regulator improperly used in the application or improperly installed and maintained.

#### **4.1 Marking of safety instructions in the operating manual**

The safety instructions are intended to protect the user from dangerous situations and/or material damage. In the operating instructions the seriousness of the potential risk is designated by the following signal words:

 **Warning:** Safety Instructions whose non-observance may be hazardous to persons, and/or cause damage to property.

 **Caution:** Safety Instructions whose non-observance may lead to product damage, or loss of function. Product Marking: Nameplate and label marking on the equipment itself contains the primary functional limits information. This information must be absolutely followed and kept in legible condition.

#### **4.2 Qualifications and training of personnel**

Operating, maintenance, inspection and installation personnel must be qualified to carry out their respective duties. Areas of responsibility, competence, and proper levels of supervision should be clearly defined by the user. If personnel are not sufficiently qualified, additional training and instruction should be carried out, to ensure that operating instructions are fully understood by the responsible personnel.

#### **4.3 Non-compliance with safety instructions**

Non-compliance with these safety instructions can jeopardize the safety of personnel, the environment, the regulator and/or the system. Non-compliance with these safety instructions will lead to forfeiture of any rights to claims for damages.

#### **4.4 Safety Awareness**

It is essential to comply with the safety instructions contained in this manual, along with the relevant national, state and local health and safety regulations, and the operator's own internal operating and safety instructions.

#### **4.5 Safety instructions for the operator/user**

Isolate the regulator from all system pressure before performing any service procedures. Leakage of any dangerous liquids (toxic or hot) at any exterior mechanical joint seal must be drained off without any danger to persons or the environment. All Federal, State and Local Rules regarding chemical disposal and handling must be followed.

#### **4.6 Safety instructions for maintenance, inspection and installation work**

The user must ensure that all maintenance, inspection and installation work is carried out by authorized personnel, who are familiar with the manual. As a rule all work on the unit should only be carried out after the regulator has cooled down and pressure has been released. Proper tag out or lockout is strongly recommended. Immediately after completion of work, all safety and protective devices in system should be refitted and fully functional. Please observe all relevant system start-up safety rules.

#### **4.7 Unapproved modifications and use of non-genuine spare parts**

Modifications or changes to the unit are only permitted upon approval of Barksdale. Only genuine spare parts and original accessories will ensure the safety of the unit. The use of other than original parts voids the warranty and will lead to forfeiture of the declaration of conformity and will invalidate any liability for damages caused thereby.

#### **4.8 Unapproved usage**

The operating reliability and safety of the regulator is only valid if used in accordance with its specified technical limits as described in the Installation and operating instructions. Any other use is not in conformity with the regulations, and Barksdale will not be liable for any resulting damages.

The installation and operating manual does not invalidate general regulations and standards not referred to general technical rules should be observed.

## 5.0 TECHNICAL DATA

### 5.1 Technical Specification

Specifications has been mentioned on provided catlog or sales drawing with the product.

**Table 2. Product Specifications**

<b>Pressure:</b> Supply/Inlet Pressure:	5,000 psi (345 bar)	<b>Materials of Construction:</b> Body:	Stainless Steel (standard)
Regulated Pressure Range: High Sensitivity Full Range	300 - 1600 psi (21 - 110 bar) 300 - 3000 psi (21 - 207 bar)	Flanges:	Carbon Steel (standard) Option: Stainless steel
Regulated Pressure Range "F" Prefix Pneumatic failsafe motor: High Sensitivity Full Range	300 - 1600 psi (21 - 110 bar) 300 - 3000 psi (21 - 207 bar)	Spring Tower Housing: Manual: Pneumatic Motor model: Hydraulic Motor model:	Phosphate coated alloy steel (std.) Phosphate coated alloy steel (std.) Phosphate coated alloy steel (std.) Option: Stainless Steel
Regulated Pressure Range "G" Prefix Hydraulic failsafe motor: High Sensitivity Full Range	300 - 1600 psi (21 - 110 bar) 300 - 3000 psi (21 - 207 bar)	Standard O'ring Material:	Buna N
Fluid Temperature Range:	-40° to +250°F (-40° to +121° C)	Socket Head Screws:	Zinc plated alloy steel (standard) Option: Stainless steel
Proof Pressure:	7,500 psi (517 bar)	Wetted Parts:	Stainless steel & bronze
<b>Flow:</b> Flow Rate:	45 GPM (@ 50/ft/s)	<b>Pneumatic Pilot Motor</b> ("F" prefix): Pilot Motor Working Pressure:	80 - 120 psi (5.5 - 8.3 bar)
Cv Inlet:	6.7	Porting:	1/4" NPT
Cv Vent:	6.7	Operating Temperature Range:	32° to +250°F (0° to +120°C)
<b>Porting:</b> Inlet:	1/2" NPT Standard, SAE Option	<b>Hydraulic Pilot Motor</b> ("G" prefix): Pilot Motor Working Pressure:	400 - 1600 PSI (6.9 - 110 bar)
Outlet:	1/2" NPT Standard, SAE Option	Porting:	SAE for 3/8" Tube (Size -6)
Vent:	1/2" NPT Standard, SAE Option	Operating Temperature Range:	-40° to +250°F (-40° to +121°C)
Bleed Port:	1/4" Dia. hole	<b>Approximate Shipping Weight:</b> Manual:	21 lbs. (9.5 kg)
		Pneumatic or Hydraulic Motor:	44 lbs. (20.0 kg)


## 5.2 Product Configurator

Figure 1. Product Configurator for Regulator 20313

<b>EXAMPLE:</b>		<b>20313S6WQ2</b>		
<b>Adjustment Method</b>				
Blank	Manual			
F	Pneumatic failsafe motor			
G	Hydraulic failsafe motor			
<b>Series</b>				
20313S6WQ2	1/2" Shear-Seal Regulator			
		<b>Option</b>		
		Blank	NPT porting	
		- MS	SAE porting	
		- SS	Stainless steel Flanges & trim	
		<b>Regulated Pressure Range</b>		
		Blank	High sensitivity	300 - 1600 psi (21 - 110 bar)
		-1	Full range	300 - 3000 psi (21 - 207 bar)

5.3 Overall Dimensions

Figure 2. Dimensions for 20313 Regulator

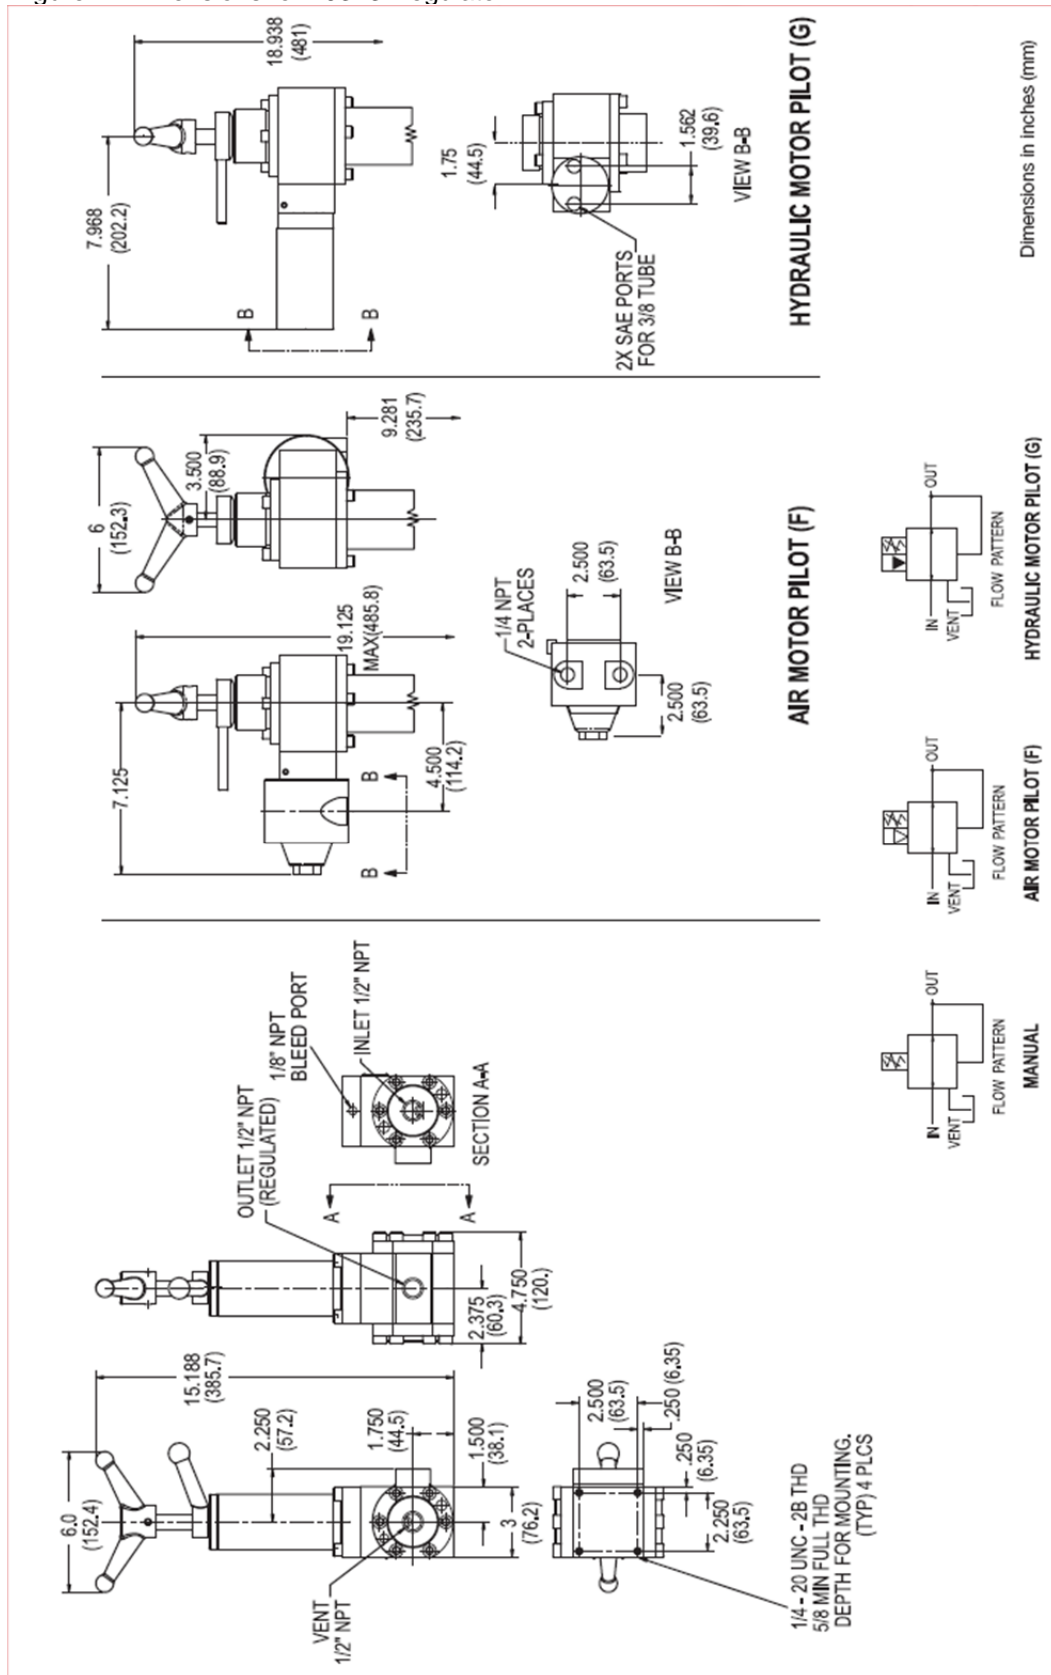

## 6.0 INSTALLATION

Make sure of ports are clean from debris that may have accumulated during storage or transportation. Confirm system operating condition before installation and should be as per regulator specifications.

**⚠ Caution:** *Pressure regulator should be installed in an assembly where the design pressure of the system downstream of the device is lower than the pressure which can occur upstream of the device and the system downstream should be protected by a safety accessory. (As stated by PED 97/23/EC).*

6.1 Install regulator horizontally or vertically using mounting holes (3/8-16 UNC-2B), 4 places.

6.2 Connect pipes – 1/2" NPT Inlet & Outlet, 1/2" NPT Vent to assemble regulator in your system. SAE port option is available as per customer requirement.

6.3 If required, connect supply line to Air pilot or Hydraulic pilot motors for adjusting the pressure outlet set point.

## 7.0 OPERATION

The Regulator 20313 is a 1/2" valve having options for manual operation, Air motor operation or Hydraulic motor operated. The regulator comes set at the mid-point of the pressure range. Follow these instructions to adjust the set point.

**⚠ Warning:** Be sure that system pressure has been vented prior to operation.

7.1 For manual Regulator, loosen the locking handle, rotate the adjusting handle down to desired pressure and set the locking handle tight.

7.1.1 To increase pressure, rotate handle clockwise, to decrease pressure, rotate the handle counter-clockwise. Always tighten the locking handle after setting the regulator.

7.2 For Failsafe Regulator, the locking handle must be tight for the motors to engage. Note: If locking handle is not fully engaged adjustment handle will spin freely during motor operation.

7.2.1 To adjust set point, apply pressure to pilot port "A" for an increase in set point and to port "B" for a decrease in set point. Required range as in Table 3.


**Table 3.**

Set Point operating Condition	Port Size	Pressure Range	Operating Temperature
Air motor Pilot Pressure	1/4" NPT	80 - 120 PSI (5.5 - 8.3 bar)	32° to +250°F ( 0° to +120°C)
Hydraulic motor Pilot Pressure	SAE for 3/8" Tube	400 - 1600 PSI (6.9 - 110 bar)	- 40° to +250°F (-40° to +121°C)

**NOTE:** Regulator is designed to work with oil-based hydraulic fluid as well as with lubricated water.

7.3 Regulators work according to below flow patterns shown in Figure 3.

Figure 3.

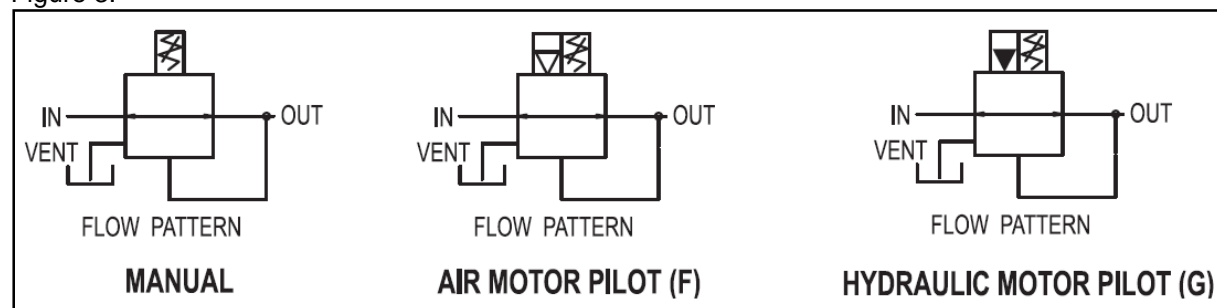

## 8.0 TROUBLE-SHOOTING

**⚠ Caution:** Table 4 is used as a quick trouble shooting tool and mainly for reference only. It does not mean to list all possible causes and solutions to the problems as seen by the user on Regulator. Contact factory or authorize dealers for technical support and issues.

**Table 4.**

PROBLEM	POSSIBLE CAUSE	SOLUTION / RECOMMENDATION
Handle does not move	Outlet port line has pressure restrictions.	Refer sales drawing for outlet pressure range.
	Vent port has restrictions.	Connect Vent port line to atm tank.
No Actuation	No pilot pressure	Provide pressure to pilot line
	Pilot line pressure blocked	Only one pilot port may be pressurized at a time.
	Locking handle not tight.	Tighten handle with rubber mallet.
	Pilot line leaking	Tighten or replace pilot line.
External leakage	Loose connections	Tighten connections.
	Exceeding maximum working pressure	Refer to data sheet
Internal leakage	Wear/Tear of pressure seals and O rings	Replace with new Seals and O-Rings.

## 8.1 MAINTENANCE INSTRUCTIONS

### CAUTIONS

*All repair of Barksdale ShearSeal® Regulators should be performed in a clean area free of excess dirt and debris. The ShearSeal® components are manufactured to precise tolerances and can be damaged if proper care is not taken.*

### WARNING


*Isolate the regulator from all system pressure before performing any disassembly procedures.*

**⚠** Exploded view provided by Barksdale and/or distributor for reference only. It is strongly recommended that all repairs and kit installations are completed by appropriately trained personnel. The customer will assume all risk associated with the use of unauthorized parts or personnel.



SERIES 20313

1/2" HEAVY DUTY HYDRAULIC REGULATOR

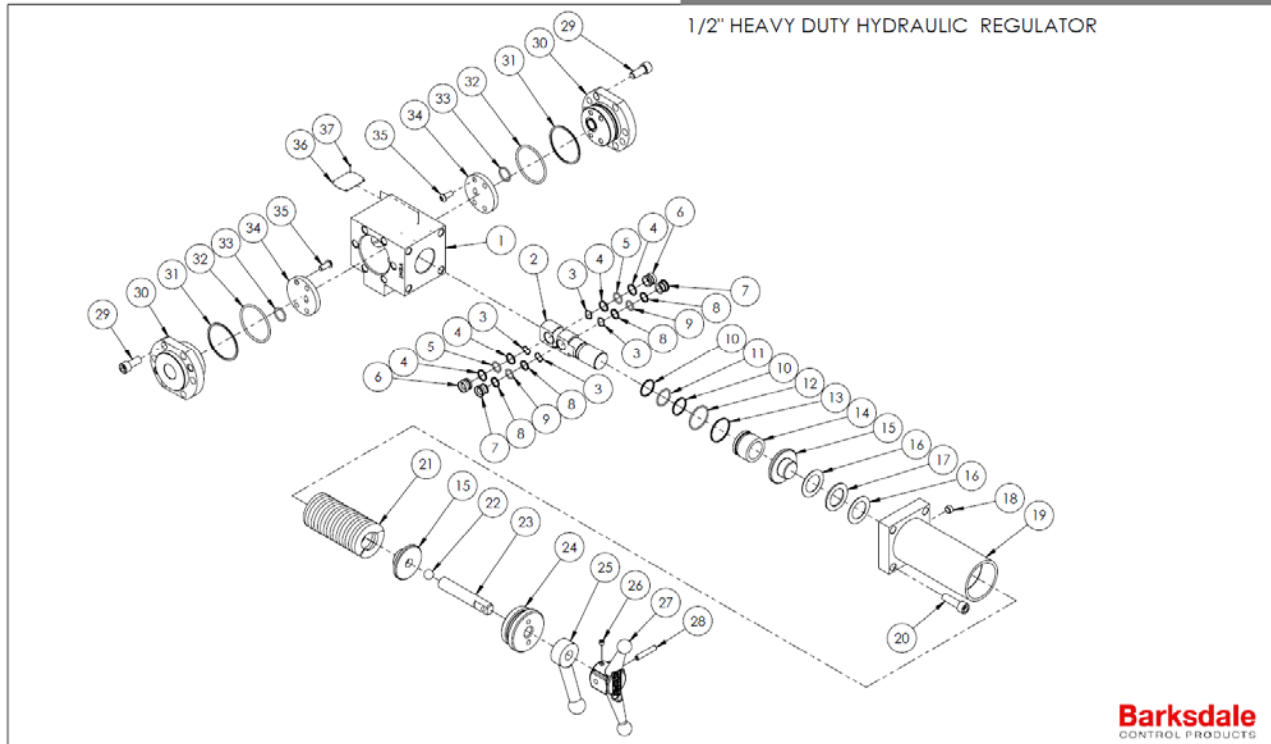

**Disassembly**

1. Disconnect all fittings from the regulator and pilot motor
2. Turn locking device(25) counterclockwise first. Turn handle(27) counterclockwise to remove load from compression springs
3. Remove spring housing bolts(20)
4. Lift the spring housing assembly(19) together with spring(21) and SPRING gland(15)
5. Remove flanges (30)
  - a. Remove bolts(29) from inlet(30) and vent(30) flanges, pull the flanges out
  - b. Note: If using major repair kit, remove bolts (35) from inlet/vent flange (30). Replace inlet/vent plates (34)
6. Remove piston gland (14) and push out the slide assembly(2, 14) towards the top, (14) and slide(2)
7. Take out pressure seals(6, 7) from slide(2)
8. Uninstall all soft goods (o-rings and back-up rings)

**Cleaning and Inspection**

1. Thoroughly clean and inspect the slide(2) and piston assembly(2, 14). Look for signs of wear, replace if necessary
2. Thoroughly clean and inspect the wear plates (34) on the internal side of the internal side of the inlet/vent(30) flanges. Look for signs of wear or scratching, replace if necessary.
3. Inspect all pressure seals(6, 7) for wear, if signs of damage, replace.
4. Check all o-rings, back-up rings and washers, replace if necessary.

**Re-assembly**

1. Lightly lube all soft goods from Repair Kit with petroleum based lube (mobile lube)
2. Re-install all o-rings (wherever back-up rings are used, refer to exploded view drawing to assure proper orientation of back-up rings in relation to o-rings)
3. If using major repair kit, ensure o-rings (33,31) are installed prior to aligning inlet plate (34) to inlet flange (30) and secure with bolts (35), torque to 35-40 in-lbs. Repeat steps vent side (ensure proper alignment).
4. Re-install pressure seals(6, 7) and wave washers(3) back into the slide(2) (make sure back-up o-rings are not extruding)
7. Insert slide(2) and piston assembly(2,12) from top face
8. Insert the piston gland(14)
9. Insure up-down movement of slide by hand to make sure it travels freely

11. Insure slide movement is smooth inside
  12. Install ALL flanges: Starting with the inlet (30) \*Verify orientation of plates(34)\*. Then Proceed to tilting the regulator so that the inlet(30) flange is laid down to prevent the PRESSURE SEALS(6, 7) from falling when installing the vent(30) flange.
  13. Tighten bolts (29) on all flanges to 192-240 in-lbs
  14. Place spring housing assembly(19) into place and tighten the spring housing screws (20) to 50-100in-lbs
  15. Turn handle(27) all the way in (preload compression spring 3-4 turns clockwise)
- Assembly is complete

## **9.0 TRANSPORT / STORAGE**

Severe shock and vibration should be avoided during transport. Store it in a clean and dry environment. Regulator is ready for operation upon delivery. The protective port plugs should not be removed until immediately before plumbing the regulator. **To avoid damaging regulator or/and pilot motor, do not lift or carry by the handle.**

It is recommended to transport it with the lifting equipment suitable for the weight to be moved. Do not hook-up lifting equipment to accessory such as handle, or pressure bores. When using a suspension belt it must be placed around the regulator body, providing edge protection and ensuring weight distribution. Transport/storage temperature is recommended to be between -40° C (-40° F) to +93°C (200°F). Protect existing sealing surface

## **10.0 DISPOSAL/RETURNS**

Regulator that has come in contact with health – threatening media must be decontaminated prior to disposal or returned to Barksdale.

Follow proper Federal/ State and local regulations for appropriate disposal to protect the environment.

## 11.0 NAMEPLATE



Nameplate is permanently secured to one side of regulator body with the following information: model part number, working pressure (WPR) and serial number (SN). The first 6 digit numbers of the serial number represent the date of manufacture (MM month/DD date/ YY year).

## 12.0 WARRANTY

See Barksdale “STANDARD TERMS AND CONDITIONS” document for **STANDARD WARRANTY**.

## 13.0 MANUFACTURE AND INQUIRIES

Please contact Customer Care for product inquiry or any product related questions or issues.

**Barksdale**  
CONTROL PRODUCTS  
3211 Fruitland Avenue  
Los Angeles, CA 90058  
Phone: (800)-835-1060  
Fax: (323)-589-3463  
[www.barksdale.com](http://www.barksdale.com)